



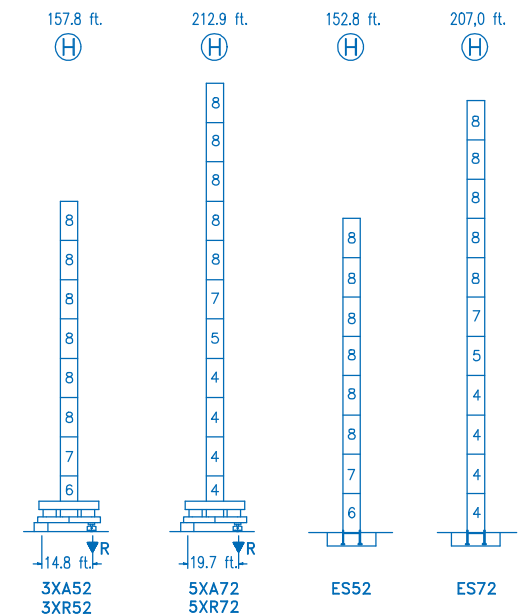

N	Ref.	Ø (ft.)	h (ft.)
4	S25	6.6	18.0
5	TS25	6.6	18.0
6	S24	6.6	18.0
7	TS24	6.6	18.0
8	S23	6.6	18.0
10	S15	5.2	18.0
12	CLS15	5.2	10.2

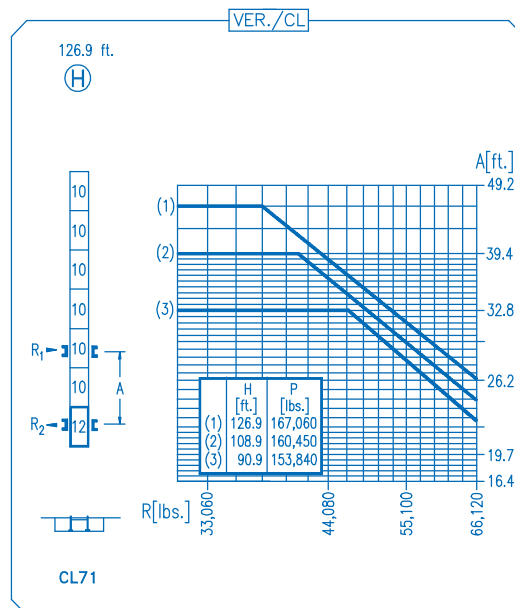

R. máx.	En servicio In operation En service In Betrieb	3XR52 198,580 lbs.
		5XR72 210,920 lbs.

R. máx.	Fuera de servicio Out of service Hors service Ausser Betrieb	3XR52 208,060 lbs.
		5XR72 295,340 lbs.

CFU-7.5

10 hp.

0 ⇄ 308 ft./min

GR-12

2 x 88 ft.lbs.

0 ⇄ 0.8 rpm

TRA-7.5

2 x 55 ft.lbs.




0 ⇄ 78 ft./min

TRA-7.5VC

2 x 55 ft.lbs.

0 ⇄ 78 ft./min

5XR72

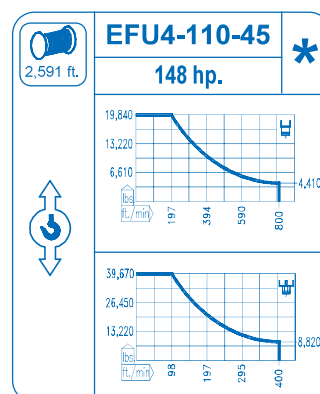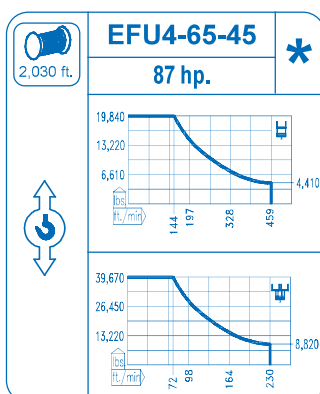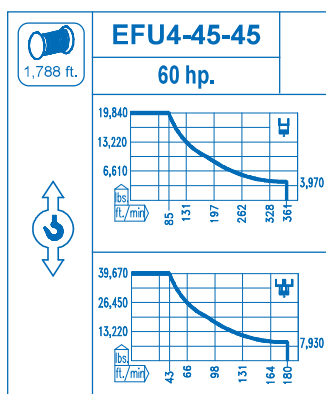

Tensión de alimentación Operating voltage Tension de service Betriebsspannung	480 V 3 ph 60 Hz
--	---

Opcional Optional En option Kaufoption	*
---	----------