




COMANSA

LINDEN 2100


21 LC 210

18 t

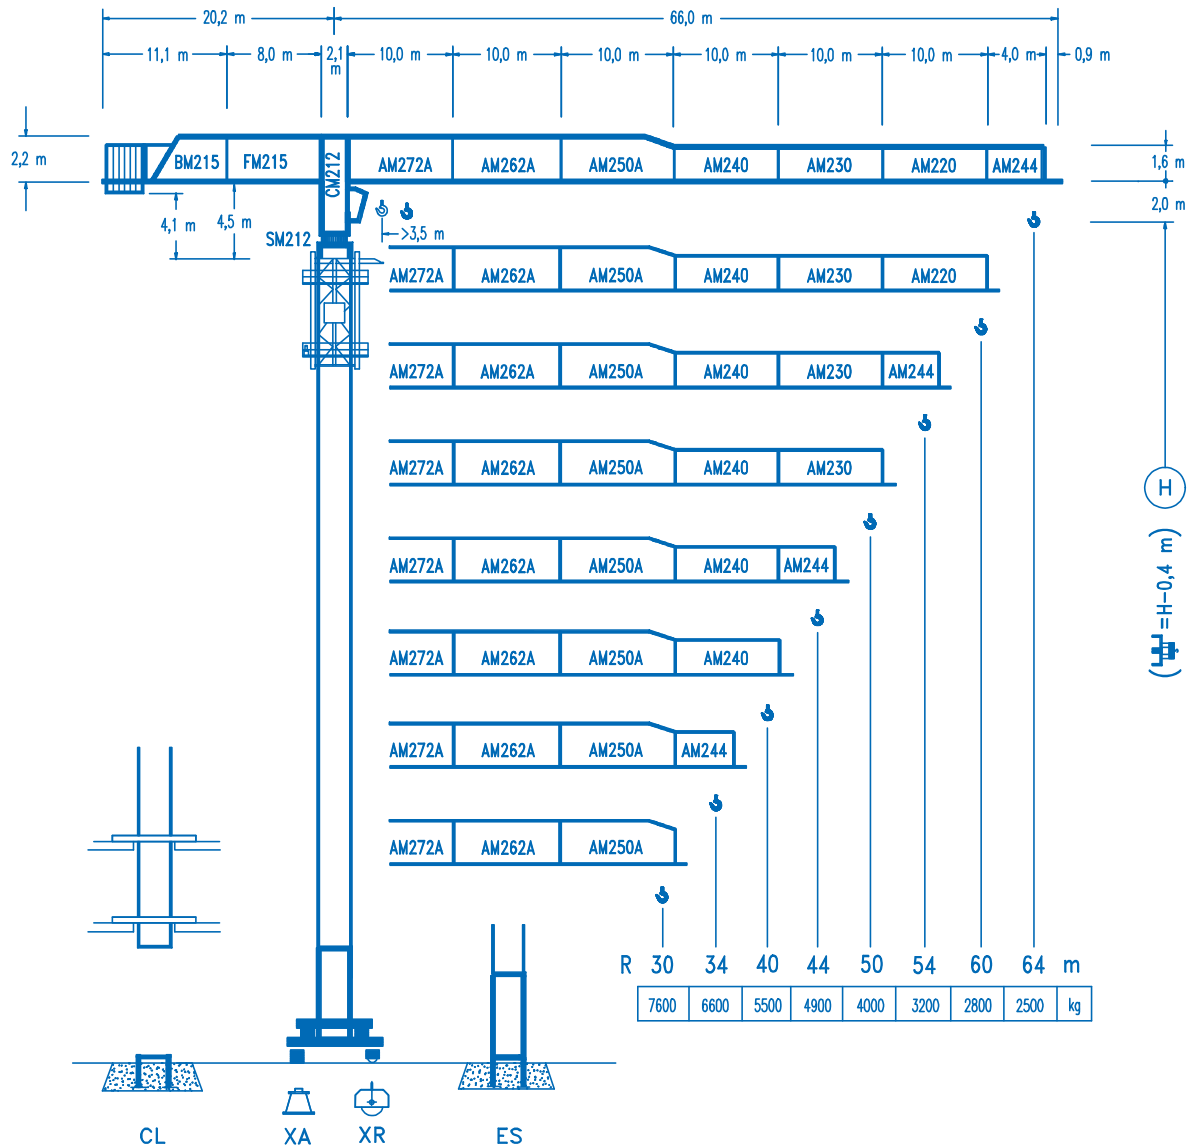


CE
DIN 15018 H1 B3

R														
64	11,7	15	21,0	21,1	25	30	34	40	44	50	54	60	64	m
	18000	13455	9000	9000	7460	6075	5270	4375	3920	3370	3075	2705	2500	kg
60	11,9	15	21,5	21,7	25	30	34	40	44	50	54	60		
	18000	13760	9000	9000	7690	6265	5440	4520	4045	3485	3180	2800	kg	
54	11,9	15	21,4	21,8	25	30	34	40	44	50	54	m		
	18000	13710	9000	9000	7735	6305	5475	4545	4070	3505	3200	kg		
50	13,1	15	20	23,6	24,4	30	34	40	44	50	m			
	18000	15330	10940	9000	9000	7140	6205	5165	4635	4000	kg			
44	13,6	15	20	24,5	25,6	30	34	40	44	m				
	18000	15995	11430	9000	9000	7535	6555	5460	4900	kg				
40	13,6	15	20	24,5	25,7	30	34	40	m					
	18000	16005	11440	9000	9000	7590	6600	5500	kg					
34	13,4	15	20	24,3	25,7	30	34	m						
	18000	15840	11315	9000	9000	7585	6600	kg						
30	13,4	15	20	24,1	25,8	30	m							
	18000	15745	11245	9000	9000	7600	kg							




DS.0346.26

09/04 Reserva de modificaciones.- Subject to modifications.- Modifications réservées.- Konstruktionsänderungen vorbehalten.

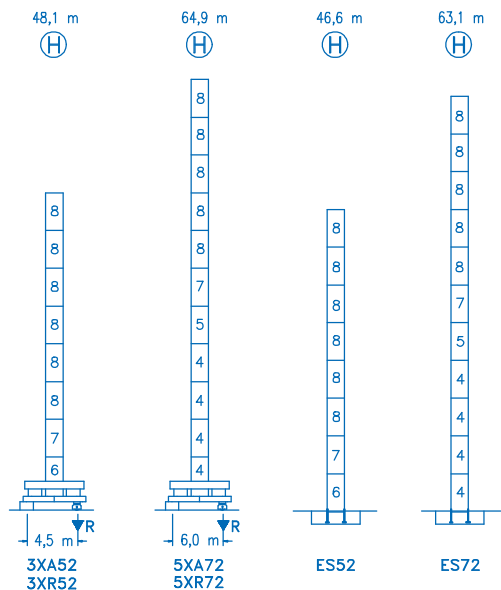

N	Ref.	h (m)
4	S25	2,0
5	TS25	2,0
6	S24	2,0
7	TS24	2,0
8	S23	2,0
10	S15	1,6
12	CLS15	1,6

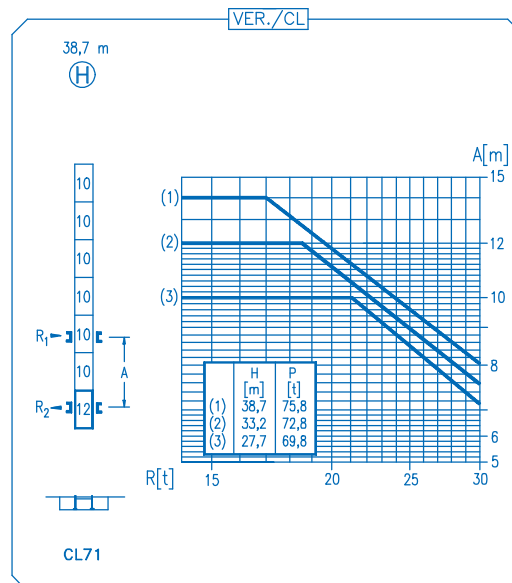

R. máx.	En servicio In operation En service In Betrieb	3XR52 90,1 t
		5XR72 95,7 t

R. máx.	Fuera de servicio Out of service Hors service Ausser Betrieb	3XR52 94,4 t
		5XR72 134,0 t

CFU-7.5

7,5 kW

0 ⇄ 94 m/min

GR-12

2 x 120 Nm

0 ⇄ 0,7 rpm

TRA-7.5

2 x 75 Nm




0 ⇄ 20 m/min

TRA-7.5VC

2 x 75 Nm

0 ⇄ 20 m/min

5XR72

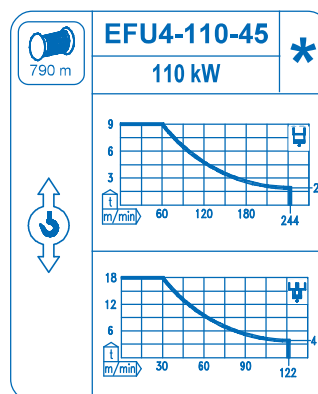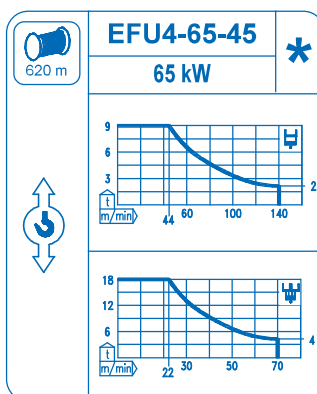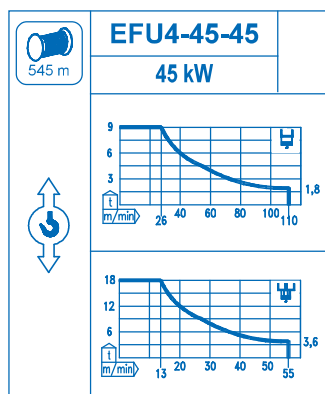

Tensión de alimentación Operating voltage Tension de service Betriebsspannung	400 V 3 ph 50 Hz
--	---

Opcional Optional En option Kaufoption	*
---	----------