



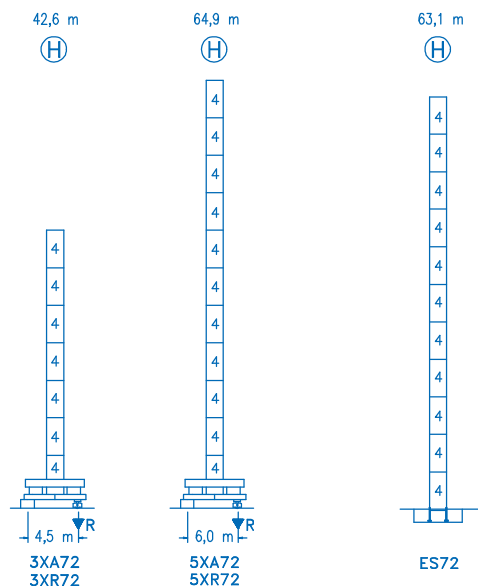

N	Ref.	h (m)	h (m)
3	TD23A	2,0	5,5
4	S25	2,0	5,5
11	CLD23A	2,0	3,1

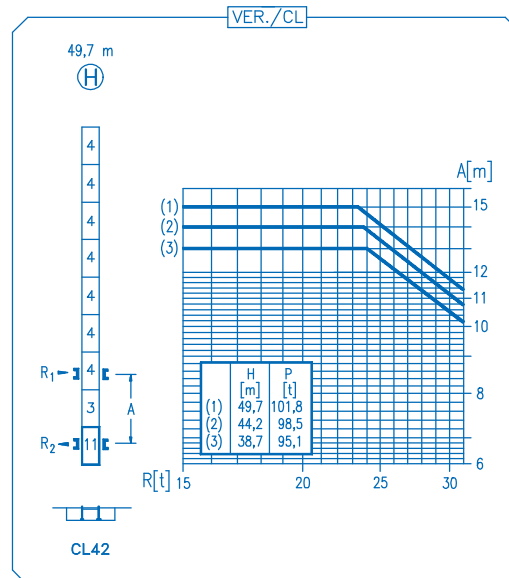

R. máx.	En servicio	3XR72 105,9 t
	In operation	
	En service	
	In Betrieb	5XR72 113,6 t

R. máx.	Fuera de servicio	3XR72 90,3 t
	Out of service	
	Hors service	
	Ausser Betrieb	5XR72 150,3 t

CFU-7.5

7,5 kW

0 ⇄ 94 m/min

GR-12

3 x 120 Nm

0 ⇄ 0,7 rpm

TRA-7.5

2 x 75 Nm




0 ⇄ 20 m/min

TRA-7.5VC

2 x 75 Nm

0 ⇄ 20 m/min

5XR72

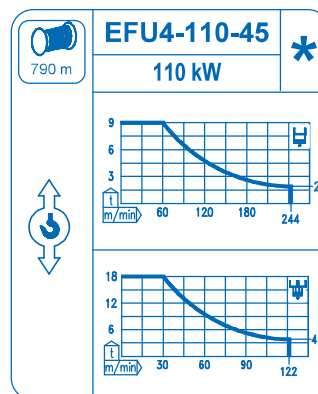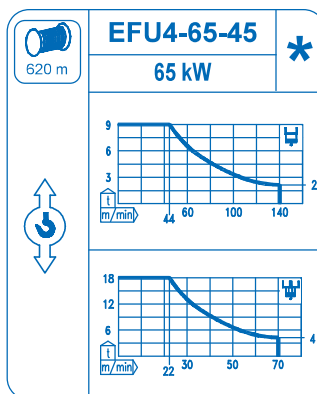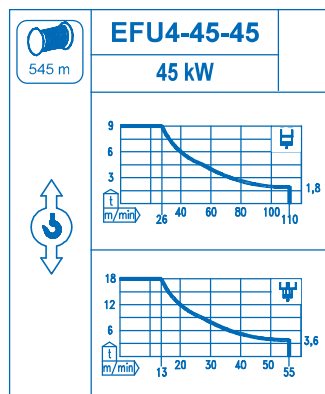

Tensión de alimentación	400 V
Operating voltage	3 ph
Tension de service	50 Hz
Betriebsspannung	

Opcional	*
Optional	
En option	
Kaufoption	