

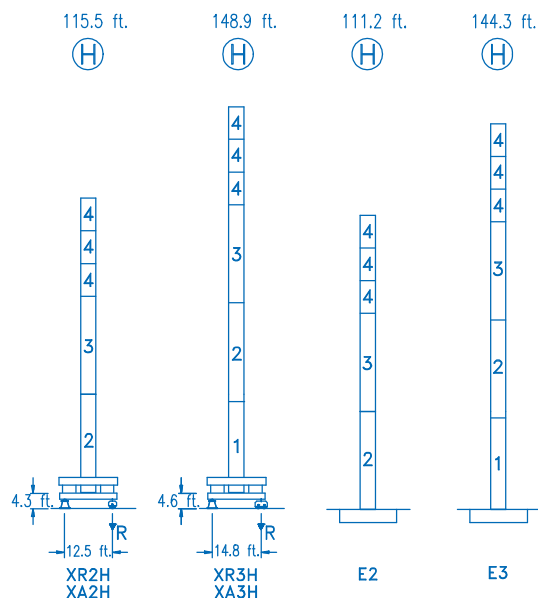


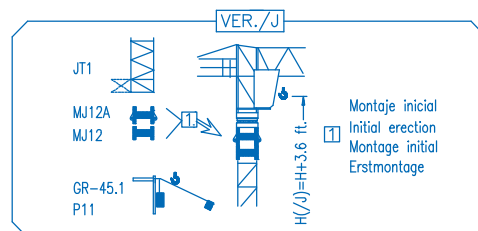

N	Ref.	h
1	MT123	33.1 ft.
2	MH124A	38.7 ft.
3	MH124-1	38.7 ft.
4	MH121	9.8 ft.
9	CL20	7.2 ft.

MH124-1=(4)MH121-0.6 ft.

	H=H+0.6 ft.
	H=H
	H=H
	H=H-0.6 ft.

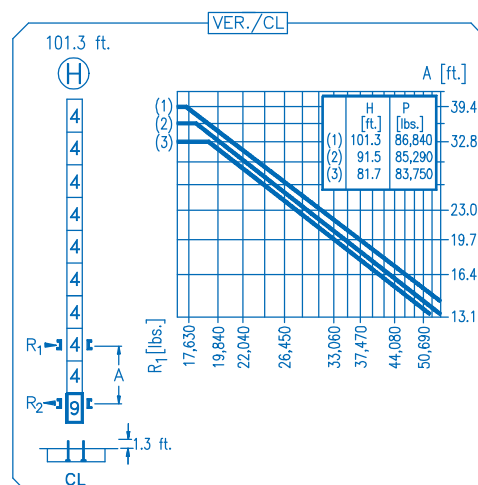

R. máx.	En servicio In operation En service In Betrieb	XR2H 96,650 lbs.
		XR3H 144,620 lbs.

R. máx.	Fuera de servicio Out of service Hors service Ausser Betrieb	XR2H 89,730 lbs.
		XR3H 101,630 lbs.

CS2-1.9

3 hp.

**66 ft./min
189 ft./min**

CFU-2.2

3 hp.

0 → 262 ft./min

GR-9.0

66 ft.lbs.

0 → 0.8 rpm

TS2-4.5 **TS2-5.5**

2x33 ft.lbs. **2x40 ft.lbs.**

0 → 78 ft./min

XR2H **XR3H**

ES3-18-12

29 hp.

	I	II	III
ft./min	32	126	252
lbs.	5,510	5,510	2,860
ft./min	16	63	126
lbs.	11,020	11,020	5,730

EFU2-18-12

24 hp.

Tensión de alimentación Operating voltage Tension de service Betriebsspannung	480 V 3 ph 60 Hz
--	---------------------------------

Optional Optional En option Kaufoption	*
---	----------