




COMANSA

LC-5211

5 t

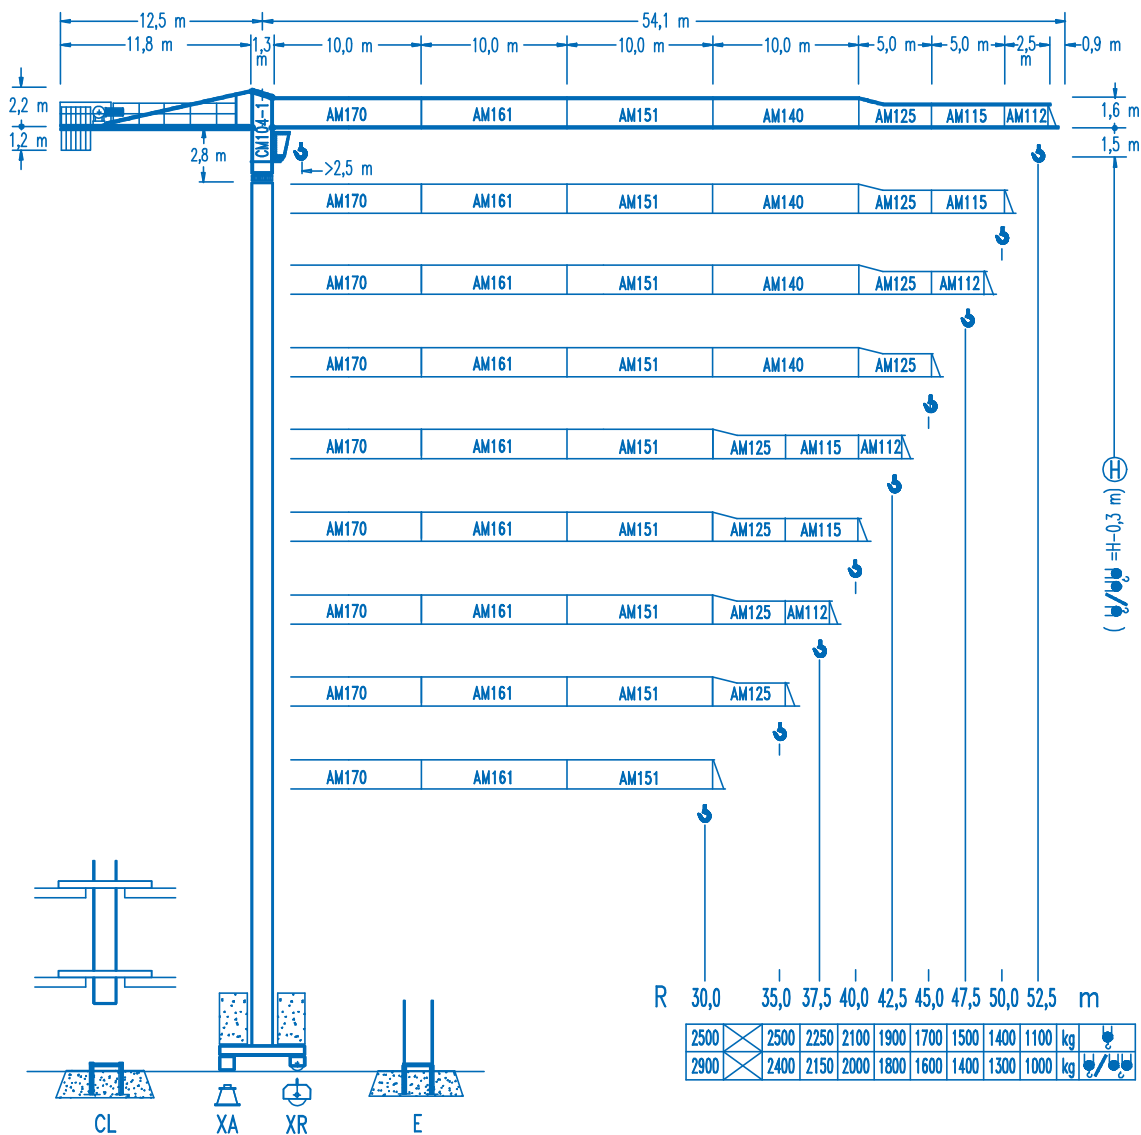


(H) = H-0,3 m

R 30,0 35,0 37,5 40,0 42,5 45,0 47,5 50,0 52,5 m

2500	2500	2250	2100	1900	1700	1500	1400	1100	kg	
2900	2400	2150	2000	1800	1600	1400	1300	1000	kg	

CE
DIN 15018 H1 B3



R	R(Cmax)	Cmax	20,0	25,0	30,0	35,0	37,5	40,0	42,5	45,0	47,5	50,0	52,5	m
52,5	26,8 m	2500	2500	2500	2190	1820	1680	1550	1440	1340	1250	1170	1100	
	14,2 m	5000	3380	2600	2080	1720	1580	1450	1340	1240	1150	1070	1000	
50,0	30,8 m	2500	2500	2500	2500	2150	1980	1840	1710	1590	1490	1400		
	16,3 m	5000	3960	3060	2470	2050	1880	1740	1610	1490	1390	1300		
47,5	30,9 m	2500	2500	2500	2500	2160	1990	1850	1720	1600	1500			
	17,1 m	5000	3980	3080	2480	2060	1890	1750	1620	1500	1400			
45,0	32,4 m	2500	2500	2500	2500	2290	2110	1960	1820	1700				
	17,1 m	5000	4200	3250	2630	2190	2010	1860	1720	1600				
42,5	33,6 m	2500	2500	2500	2500	2380	2200	2040	1900					
	17,8 m	5000	4380	3390	2740	2280	2100	1940	1800					
40,0	34,4 m	2500	2500	2500	2500	2450	2260	2100						
	18,2 m	5000	4500	3490	2820	2350	2160	2000						
37,5	34,2 m	2500	2500	2500	2500	2440	2250							
	18,1 m	5000	4470	3470	2800	2340	2150							
35,0	35,0 m	2500	2500	2500	2500									
	18,5 m	5000	4580	3560	2880	2400								
30,0	30,0 m	2500	2500	2500										
	18,6 m	5000	4610	3580	2900									

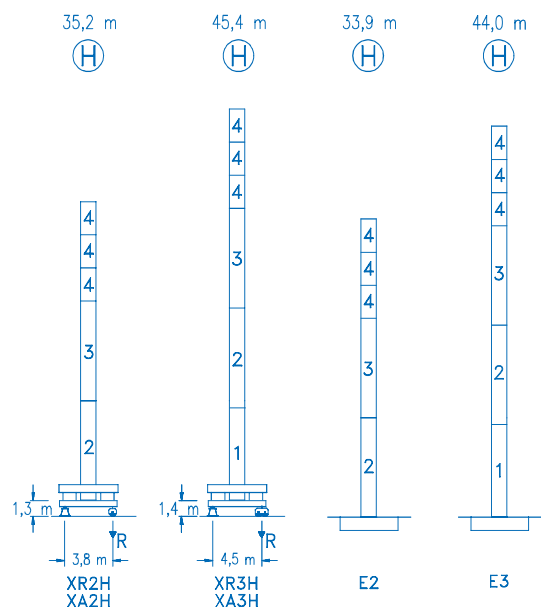

N	Ref.	h
1	MT123	10,1 m
2	MH124A	11,8 m
3	MH124-1	11,8 m
4	MH121	3,0 m
9	CL20	2,2 m

MH124-1=(4)MH121-0,2 m

	H=H+0,2 m
	H=H
	H=H
	H=H-0,2 m

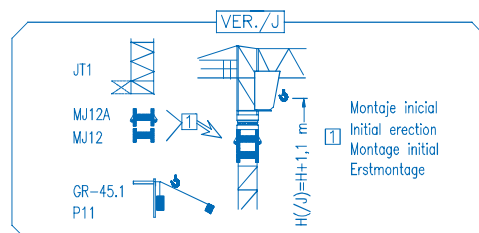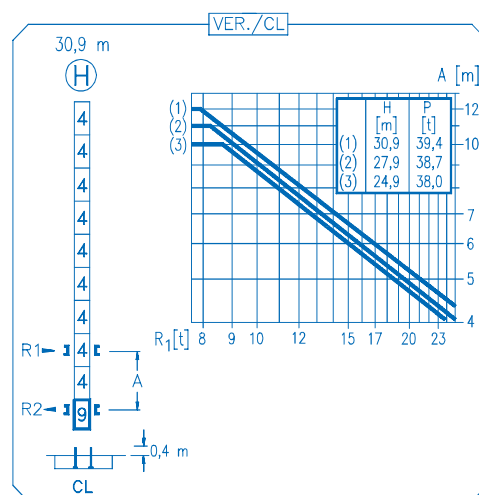

R. máx.	En servicio In operation En service In Betrieb	XR2H 46,0 t
		XR3H 49,0 t

R. máx.	Fuera de servicio Out of service Hors service Ausser Betrieb	XR2H 50,9 t
		XR3H 72,4 t


CS2-1.9
1,9 kW
16 m/min 48 m/min

CFU-2.2
2,2 kW
0 80 m/min

GR-9.0
90 Nm
0 0,7 rpm

	
TS2-4.5	TS2-5.5
2x45 Nm	2x55 Nm
0  20 m/min	
XR2H	XR3H

250 m	
ES3-18-12	
18 kW	
	I II III
	m/min 8 32 64
	kg 2500 2500 1300
	m/min 4 16 32
	kg 5000 5000 2600

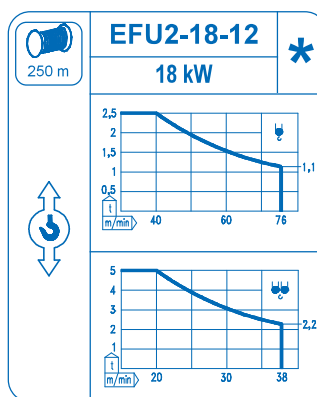

Tensión de alimentación Operating voltage Tension de service Betriebsspannung	400 V 3 ph 50 Hz
--	---------------------------------

Opcional Optional En option Kaufoption	*
---	----------